




Arboga-Darenth Group

ARBOGA-DARENTH DRAG CONVEYOR

X - 348

X - 458

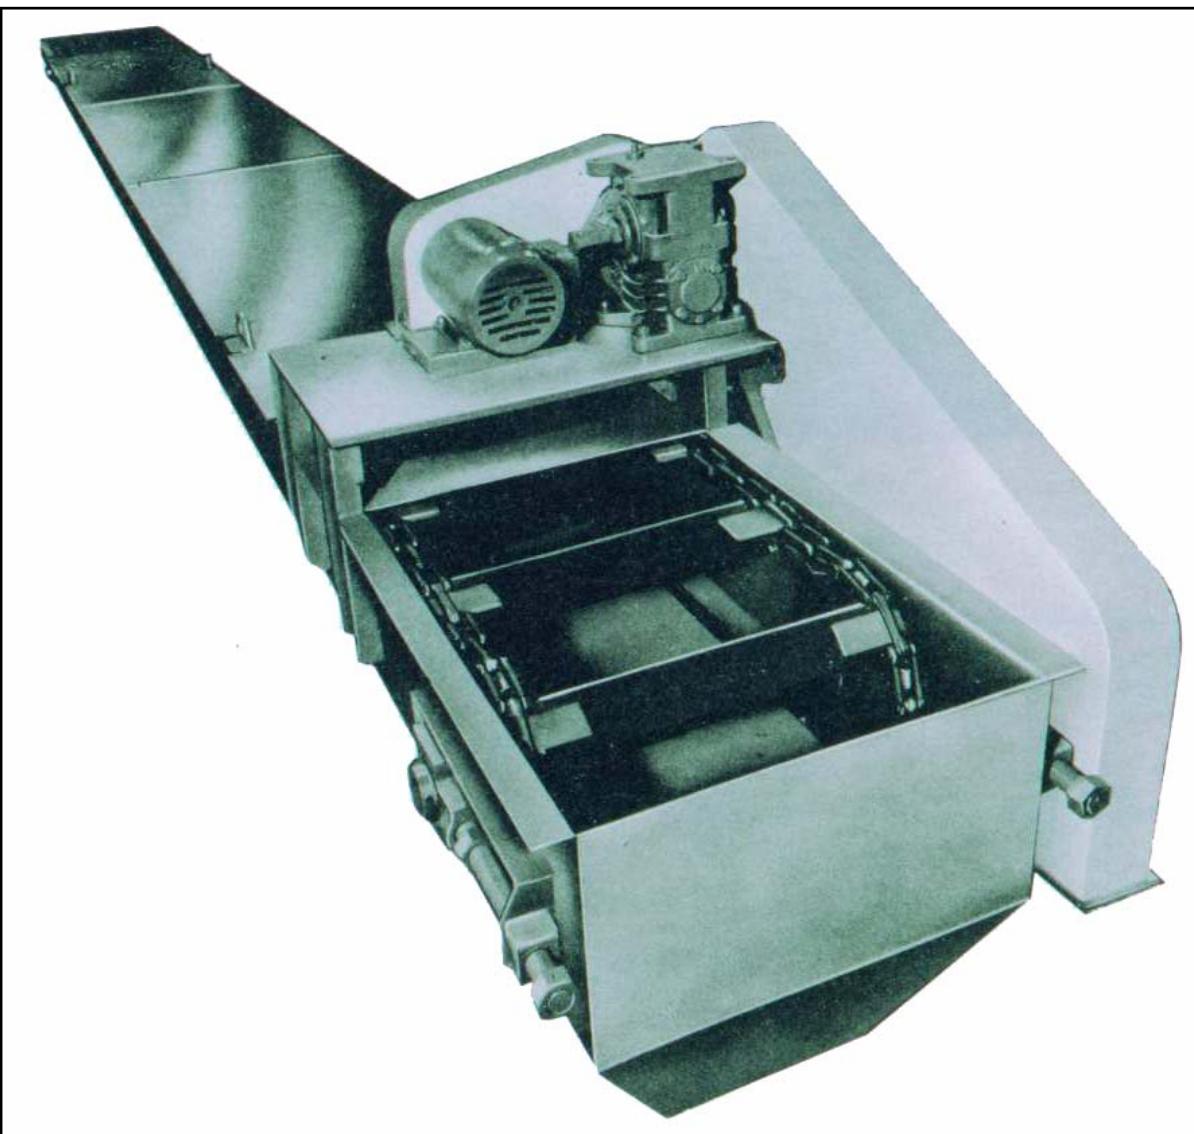


**The chain manufactured with forged links
Gives optimal working life**



**The guiding in the conveyor is performed
In Hardox steel**

ARBOGA-DARENTH DRAG CONVEYOR

Dimensions

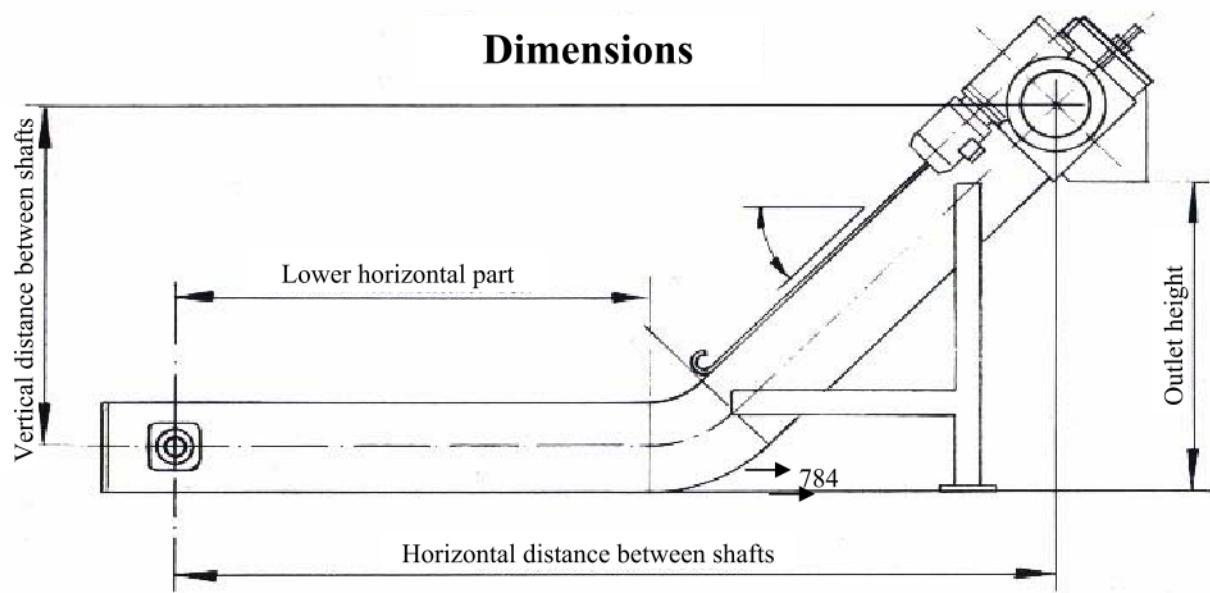

- Chain with forged links
- Scrapers every 8th pitch
- Trough of metal sheet pressed in sections
- Angle of inclination up to 60°
- Exchangeable wear plates
- Motor, gear and tightening device mounted at the discharge side

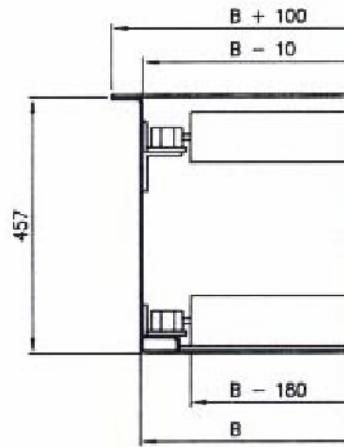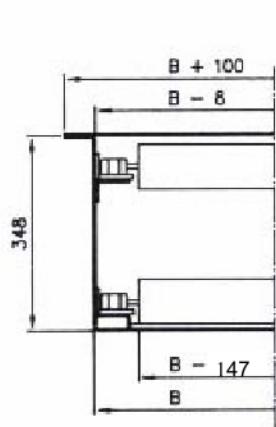

Chain - type

X-348

Thickness of plate - trough 4 mm

Scrapers - height 80 mm

Radius - bend, outside 784 mm

Trough width - B 457 mm (18")
alt. 610 mm (24")

Wear plate 8 mm Hardox 400
Chain guides 8 mm Hardox 400

X-458

5 mm

90 mm

915 mm

610 mm (24")

8 mm Hardox 400
8 mm Hardox 400